



User Manual

Updated to September 25, 2024

For more information and the latest version go to www.packandtrace.tech/help

Tabla de contenido


Line Setup	4
Main Flow	4
Validation	6
Screen components	6
Camera connection status	7
Online camera - OK	7
Offline camera	7
No read camera	8
Standby camera	8
Troubleshooting and error handling	9
Blocking Errors	S
Types of Errors and How to Solve Them	10
FAQ	1
How to change the item during the packaging process?	1
How to change the language of the application?	17

P&T Edge OCR only edition


Line Setup

Main Flow

1. Scan the **Authorization code** provided by Sperantus, and it will automatically appear in the designated text field, opening a new screen.

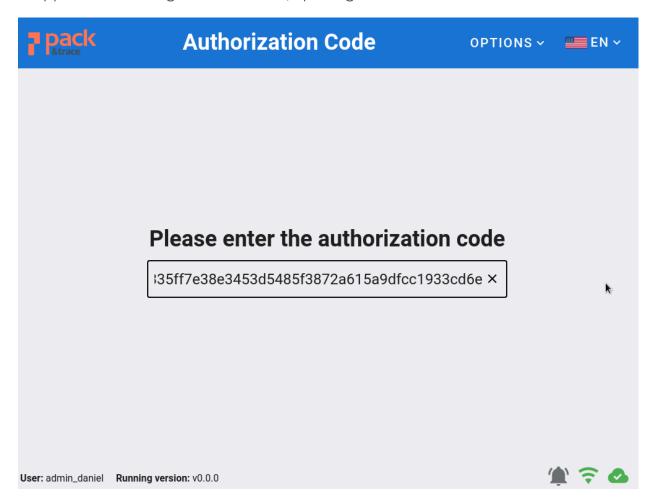


a. If the code doesn't show, click the text field and try scanning again.

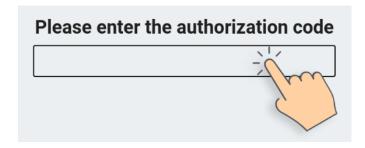

2. In the **Line Setup** screen, click the **Item number** field and select the item to be packaged in the Line, then the item description will show.

Titem number		•
105715 Pescription	KU	Work
105715 Pescription		
		*
	_ Description	
	· ·	

3. Click the right arrow and the rest of the form will show. Click each text field to select or add the required data using the on-screen keyboard.

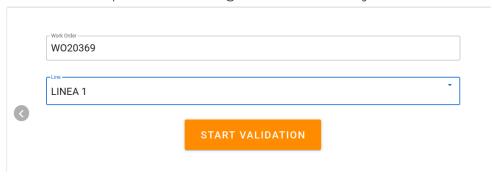




a. If it's required to change the item, click the left arrow to return to the previous screen.

4. Press to finish the Line Setup.

Validation

After completing the Line setup, the system will enter the verification state. This means that the screen will exclusively display the OCR camera's connection status and details of the ongoing labeling. During this period, there is no need to perform any activities on the screen; just stay alert in case any connection issues with the camera arise.


Screen components

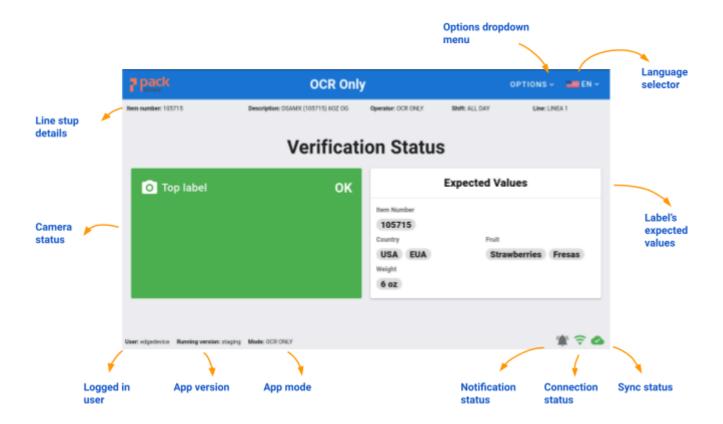

Camera connection status


Online camera - OK

In this state, the labels are passing correctly and are being detected.

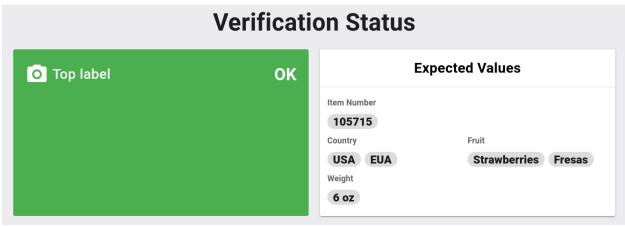


Offline camera

In this state, the system is not detecting a connected camera, so the labels are not being validated. To fix the problem it is necessary to connect and power on the camera.

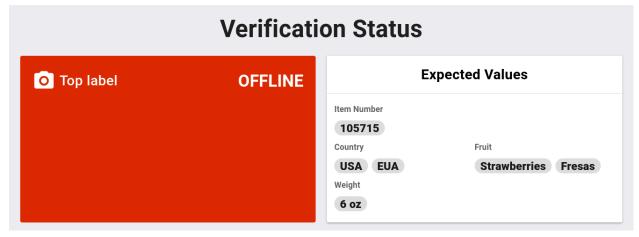


No read camera

It's when the camera is connected but detecting many empty values. To correct the issue, we will check that the camera is pointing directly at the labels and is focusing correctly.

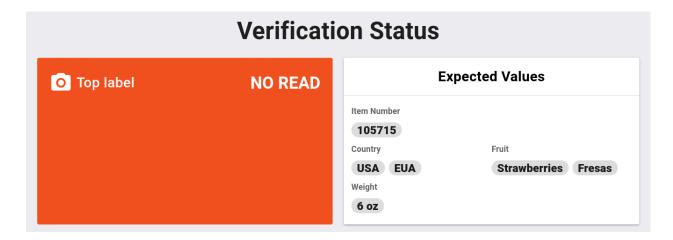

Standby camera

It's when the camera is connected correctly, but labels are not passing. As soon as the labeler starts and the labels are detected, the camera will be back online.

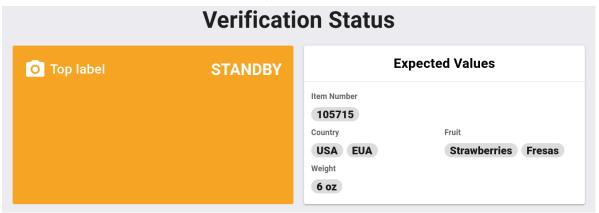


Troubleshooting and error handling

Blocking Errors

These critical errors can affect the proper functioning of the app and will appear as a blocking dialog screen when there is a high risk of data loss and critical labeling inaccuracies. Such issues could adversely affect the end-users, leading to negative consequences and potential penalty fees. It is crucial to address and resolve these errors promptly to ensure the app operates smoothly and serves its purpose effectively.

When encountering an error, the system will prompt the user to enter the supervisor code. Ignoring the error and attempting to enter the supervisor code three times will trigger the need for a higher-level unlock code, which is usually managed exclusively by Sperantus.

Example of blocking error:

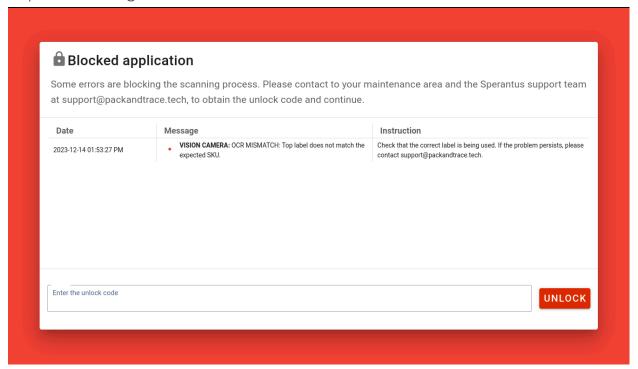

Types of Errors and How to Solve Them


Mensaje	Corrección
VISION CAMERA OCR MISMATCH: Top label does not match the expected SKU	Make sure that the correct labels are being used according to the item that was set up to be packed on the production line.
OUT OF SYNC : Edge has not synced to the server for more than 16 hours.	Resolve the network issue. If an immediate solution isn't possible, contact Sperantus for a temporary fix.

FAQ


How to change the item during the packaging process?

You can change only in instances where there are no completed or ongoing cases. However, that will end the packaging process to start a new one.


1. Start by pressing the **Options** button to open the drop-down menu.

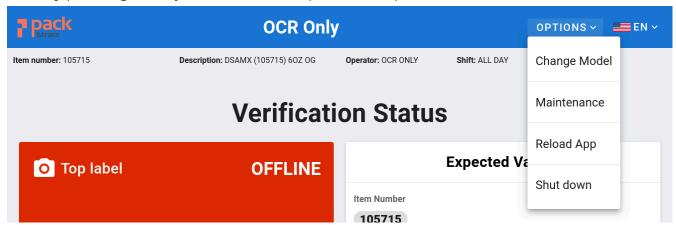


2. Press the Change Model option



3. A confirmation message will show and by accepting it, the current packaging process will end. Then it'll be necessary to start a new Line Setup process.

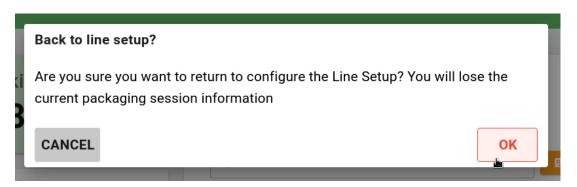

4. When starting the new Line Setup the system will ask for a confirmation to use the previous item setup. Press CANCEL to change it or OK to use it.

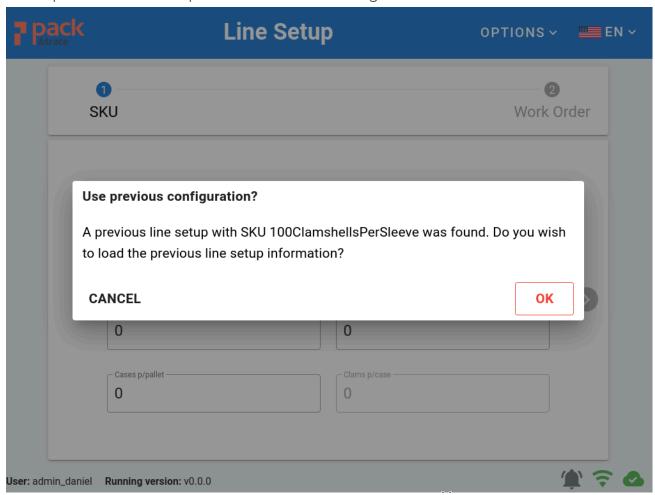

How to change the language of the application?

1. Click the flag button in the top bar.



2. Select your desired language (English or Spanish).



3. The system will now be displayed in the chosen language.

